


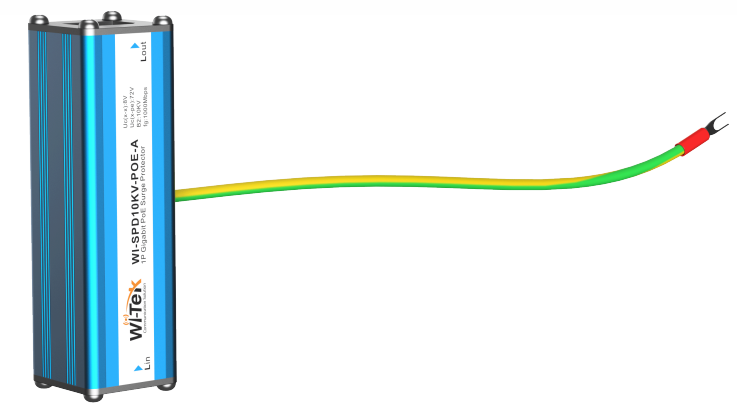

Model	Type	WI-SPD10KV-POE-A
Maximum Carrying Power	/	100W
Rated Operating Voltage	Un	48VDC(X-PE), 5VDC(X-X)
Maximum Sustainable Operating Voltage	Uc	72VDC(X-PE), 8VDC(X-X)
C2 Total Nominal Discharge Current (8/20μs)	Total	20kA
C2 Nominal Discharge Current Per Line (8/20μs)	In	2.5kA
C2 Maximum Discharge Current Per Line (8/20μs)	Imax	3kA
Protection Level: Line -PG (C10KV/2.5KA)	Up	250V
Transmission Rate	fg	1000Mbps
Response Time	tA	1ns
Insertion Loss	IL	≤0.3dB
Interface Form	/	RJ45
Number of Protection Lines	/	1, 2, 3, 6/4, 5, 7, 8
Housing Material	/	Aluminium alloy
Case Protection Class	/	IP20
Installation Mode	/	Desktop
Operating Temperature	℃	-40~85℃