




Quick Installation Guide

Wi-Fi 6 5400Mbps Outdoor Directional Wireless Access Point

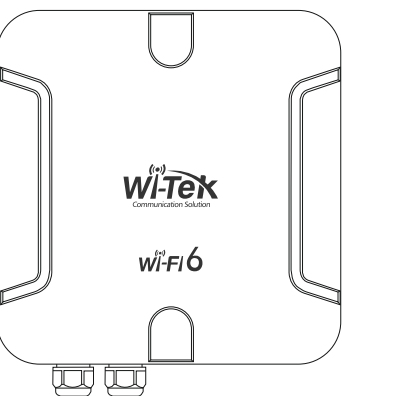

WI-AP520AX-D

www.wireless-tek.com

1.Packing Content

- WI-AP520AX-D



AP x 1



Waterproof Gland x 2




Rubber Plug x 2



M6X30 Screw x 2



M6X16 Screw x 5




48V PoE Adapter x 1




AC Power Cord x 1



Metal Tie Accessory x 2



Mounting Bracket x 3




Quick Installation Guide x 1

2.Appearance Overview

For WI-AP520AX-D

- Side Panel

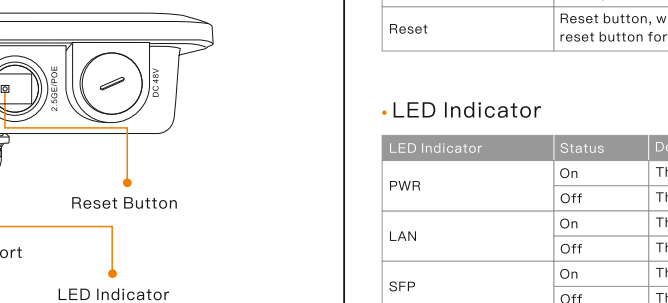


2.5Gbps SFP slot

1000Mbps Base-T Ethernet Port

Reset Button

LED Indicator

- Rear Panel

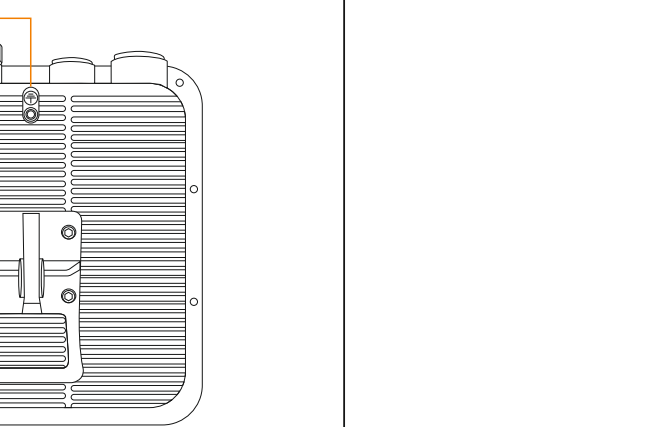

Grounding

- Port and Button

Item	Description
LAN	1000Mbps Base-T Ethernet Port, which supports 802.3at PoE Input
SFP	2.5Gbps SFP slot
Reset	Reset button, which is used to restore the factory. Holding down the reset button for 8 seconds to revert to factory settings.


- LED Indicator

LED Indicator	Status	Description
PWR	On	The device is powered on
	Off	The device is powered off
LAN	On	The port is linked
	Off	The port is disconnected
SFP	On	The port is linked
	Off	The port is disconnected
Wireless Signal	On	The device works at 5GHz and The more the number of signal lights, the greater the signal strength.
	Off	5G Wi-Fi disabled


3.Mounting

- Pole Installation


- 1.Fasten the mounting bracket with screws




- 2.Secure the mounting bracket to the pole

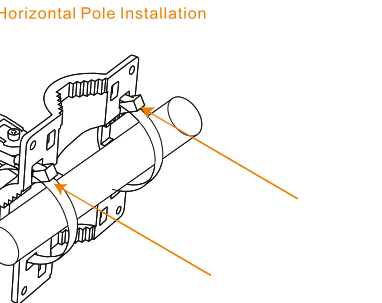

- 3.Fix the bracket to the product and tighten the screws




- 4.Adjust the Angle of the support according to the demand, and tighten the Angle adjustment screw on the support




- 4.Configuration Method


Please connect computer to the AP by Ethernet cable.

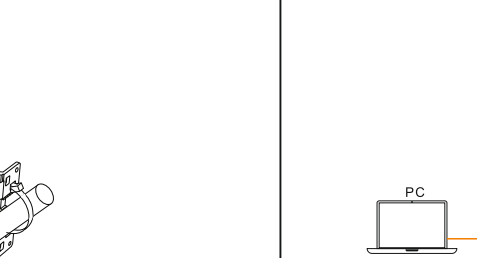


- 1.On the computer, please set the static IP under the same subnet with AP, 192.168.1.xx




- 2.Enter the SN number or scan the SN barcode on the body label and click "Auto Detect". Then enter the last six digits of the MAC address for security and click "Auto Detect".

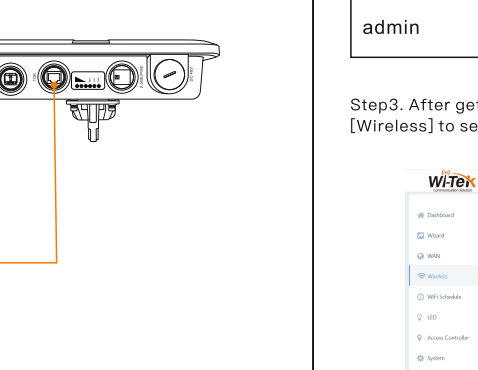

- 3.When you find the device on the cloud topology, it means the device is successfully bound to the cloud.

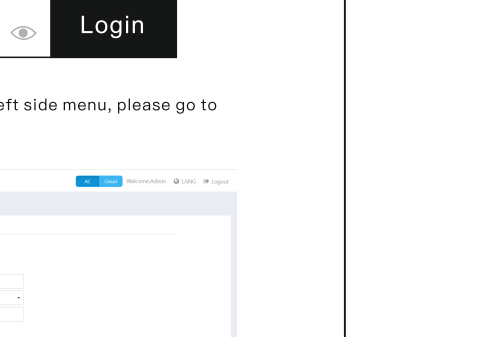

- 4.Click "Wi-Fi Configuration", you can make the basic wireless settings on the device.

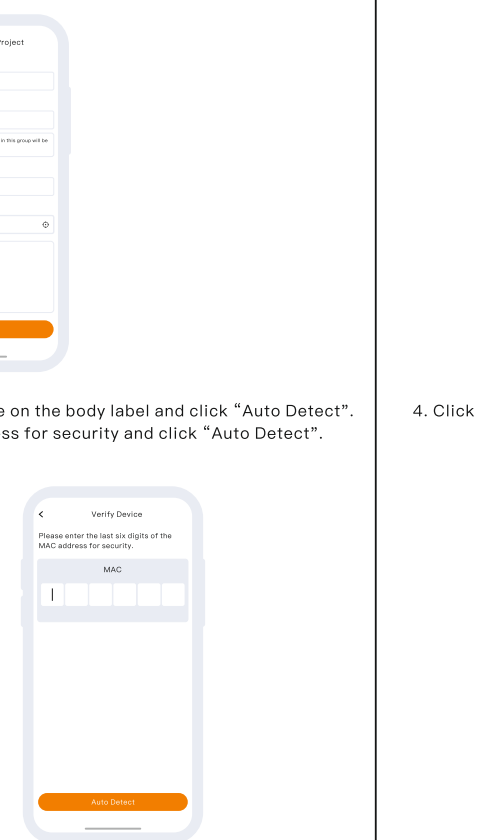

6.Warranty Card

Username	
Address	
Telephone No.	
Purchase Shop	
Purchase Address	
Product Model No.	
Purchase Time	
Serial No.	
Dealer Signature	

- If the product defects within the warranty period, we will provide professional maintenance service.
- Proof of purchase and a complete product serial number are required to receive any services guaranteed as part of the limited warranty.
- Any other defects that are not caused by workmanship or product quality, such as natural disasters, water damage, extreme thermal or environmental conditions, sticker damaged, warranty card loss will disqualify the product from limited warranty.



Company Website Cloud Management Technical Support

Wireless-Tek Technology Limited
Address: Building 3, Units 1801-1807, 1812, Huaqiang Era Plaza, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen City, Guangdong Province, China.
Website: www.wireless-tek.com
Tel: 86-0755-32811290
Email: sales@wireless-tek.com
Technical Support: tech@wireless-tek.com

